

StrandTec DesignsCeiling and Wall Panels

With the ability to be painted any color and an offering of 16 unique shapes, StrandTec Designs acoustic panels have limitless design possibilities, making it an excellent choice for any application. Flexible, variable, and mixable. Make big design statements, or keep it subtle, all while getting the performance StrandTec is known for. This environmentally friendly material is an excellent sound absorber (up to 0.95 NRC), Class A fire rated, highly resistant to microbial and fungal growth, and eligible for LEED credits.

FEATURES & BENEFITS

- Paintable to any color.
- Mix & match designs, or rotate the panel at installation for limitless possibilities
- Fire-Resistant
- Manufactured from natural materials

MATERIAL

Wood fiber, Portland cement, water.

Wood fiber is a natural material, color variations may occur.

THICKNESS

1", 1-3/8", 2", 1" Microstrand.

SIZE

24" x 24", 24" x 48", Custom Size up to 24" x 96".

EDGE DETAIL

Bevel

FINISH

Primed Clear, Primed White, Painted.

INSTALLATION

StrandTec Panels are to be mechanically fastened to an approved substrate.

FIRE RATING


Class A per ASTM E84. Passes NFPA 286 Test.

LIGHT REFLECTANCE


Unpainted 0.60. White 0.70.

StrandTec Designs Acoustical Performance


Mount Thickness	A NRC	D-20 NRC	C-25 NRC	C-50 NRC
1"	.45	.50	.80	.85
1" Microstrand	.60	.50	.80	.95
1-3/8"	.55	.60	.85	.90
2"	.75	.75	.90	.95

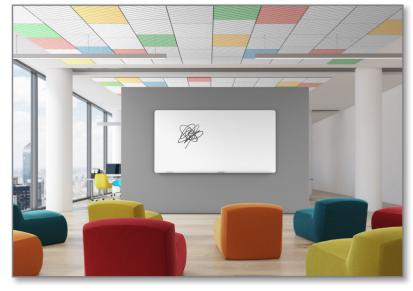



DESIGNS


































*Differences exist between the 24" x 24" and 24" x 48" panels for some designs. Visit our website for full details.







